


PRESTABLE

ZMA Type

Major Applications

Resin dissolving liquid

Coating agent for film

Conductive/ Insulation paste


Other high viscosity liquids, paste

Features

- High filtration area by RAMP structure
- High rigid support media
- Adoption of performance stabilized media
- 100% Polypropylene
- No use of binder or surfactant

Advantages

- Low differential pressure, long service life
- Excellent differential pressure vs. flow rate for high viscosity liquids
- High filtration stability against differential pressure fluctuation
- Wide range of fluid compatibility
- Low extractables risk

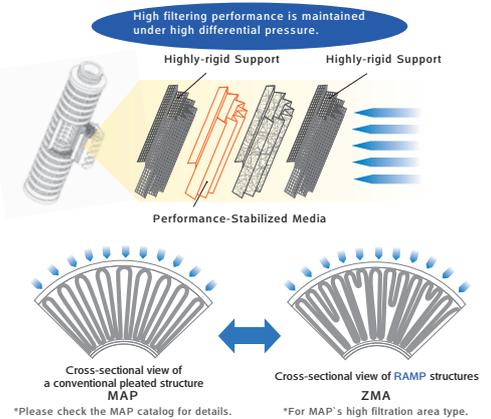
Structure

Specifications

	010	020	030	050	100	150	200	300
Grades	010	020	030	050	100	150	200	300
Micron Ratings (μm)	1.0	2.0	3.0	5.0	10	15	20	30
E.F.A. ($\text{m}^2/250\text{m m}$)	0.31	0.36	0.40	0.36	0.38	0.34	0.32	0.30
Media	Polypropylene							
Materials Core/Cage/Support	Polypropylene							
End Cap	Polypropylene							
Maximum ΔP	0.49MPa at 20°C (71psi at 68°F)							
Maximum Operating Temp	80 °C (176°F)							
Length	62.5 / 125 / 250 / 500 / 750 mm							
Dimensions O.D.	70.0mm							
I. D.	25.6 (for 0.5) / 26.1 (for F) / 29.5 (for 7) mm							


*If you need further information on specifications (length, end cap type, etc.), please contact us.

Differential Pressure vs Flow Rate

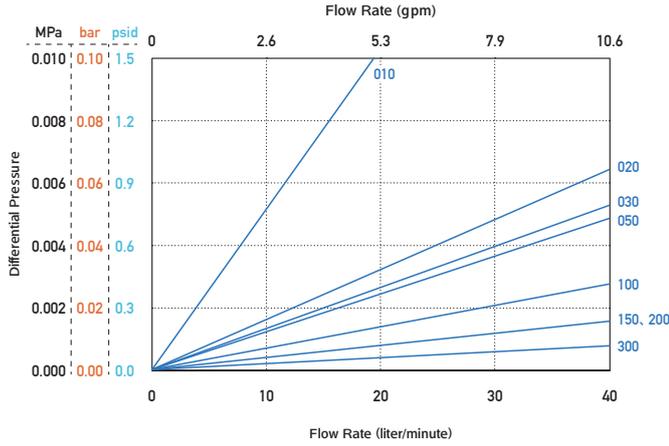Fluid: Refined Water 20°C (68°F) / Cartridge Length: 250mm



Fluid: CMC (1Pa·s) / Cartridge Length: 250mm

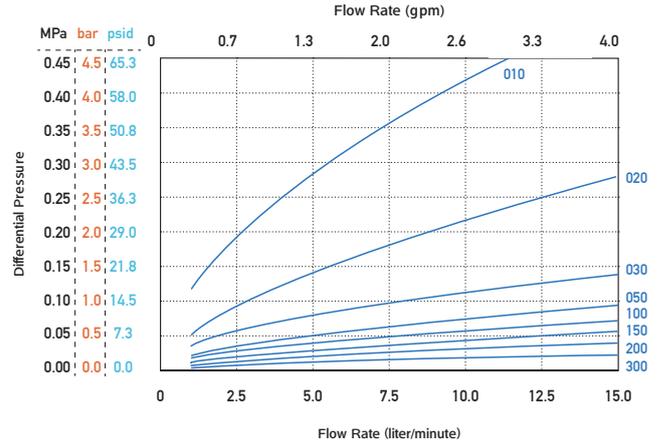

Particle Removal Efficiency

Grades	Particle Removal Efficiency (%)							
Particle Size (μm)	010	020	030	050	100	150	200	300
1.0	>99.9							
2.0		>99.9						
3.0			>99.9					
5.0				>99.9	>98			
10					>99.9			
15						>99.9		
20							>99.9	
30								>99.9


Test Conditions

Equipment : Liquid Particle Counter
 Filtration : Single Pass
 Fluid : Refined Water
 Flow Rate : 10 liter/minute
 Dust : ACFTD+LATEX Beads (ZMA-010~150)
 Diatomaceous earth (ZMA-200·300)

Ordering Information

Length	Product Type	Micron Rating	Gasket/O-Ring	End Cap Code	Packaging Code
2 5 0 L	-ZMA-	0 1 0	S	7	C
62.5 = 62.5mm 125 = 125 mm 250 = 250 mm 500 = 500 mm 750 = 750 mm		010 = 1.0 μm 020 = 2.0 μm 030 = 3.0 μm 050 = 5.0 μm 100 = 10 μm 150 = 15 μm 200 = 20 μm 300 = 30 μm	S = Silicone E = EPDM N = NBR V = FKM T = FEP Encapsulated FKM (for 0, 5, 7) PTFE (for F)	F = Flat Gaskets 0 = 2-222 O-Ring 5 = 2-222 O-Ring + Fin 7 = 2-226 O-Ring + Fin	B = 6pcs C = 10pcs F = 25pcs

End Cap Code

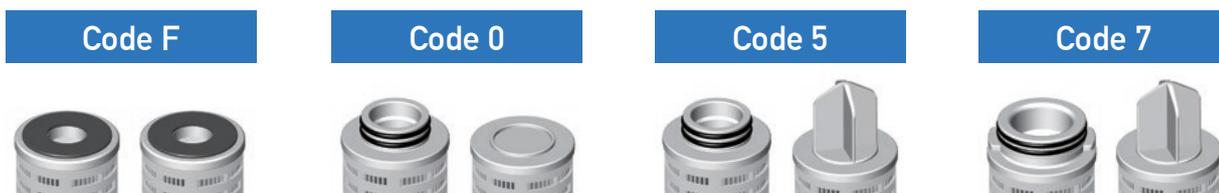

*The contents of the catalog are subject to change without notice.

*The performance data listed in the catalog are Typical values obtained under specific conditions based on our tests.

ROKITECHNO MIRAI CO., LTD.

6-20-12, Minami-Oi, Shinagawa-ku Tokyo, 140-0013 Japan

TEL: +81-3-5764-1131 FAX: +81-3-5764-0681

www.rokitechno.com

For our technical information, please click here. ▼



Manufacturing is based on our Quality Management Systems that meet ISO9001 standards.

Scope

Design, Development, manufacture, and sales of filter cartridges, housings and filtration equipment.



6th Issue
ZMA210315E